

SJTH-AISI 316 manifold

Compressed air supply manifold for demanding conditions and various purpose of use.

Acid proof manifold is available with different number of outputs. Single and double sided versions available.


Material AISI 316.



TECHNICAL DATA

Suitable fluids	Dry or lubricated air or gas and fluids
Input	3/4" or 1" R/G or NPT
Outputs	1/2" R/G or NPT
Number of outputs	4, 6, 8, 10, 12
Temperature range	- 40 ... + 90 ° C
Operating pressure	Max. 16 bar
Material	AISI 316

TYPE CODE

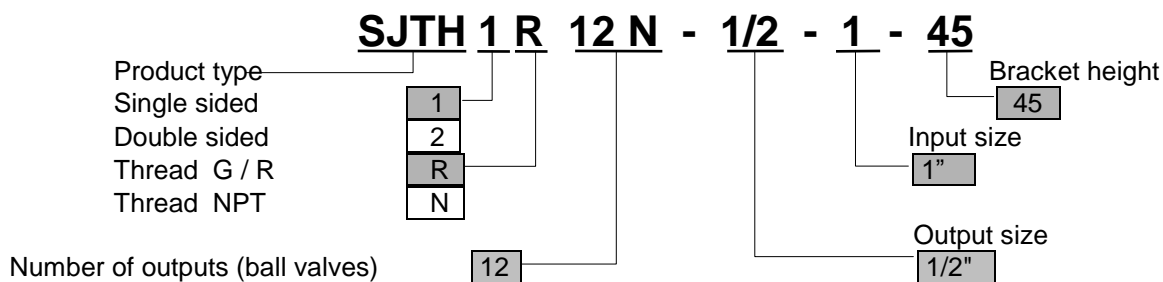

Example: Manifold **SJTH**, 1-sided, **R**-thread, **12** outputs/manual shut-off **N**, **1/2"** output size, **1"** input size, bracket height **45 mm**



Sitek-Service Ltd.

Laukaantie 4
Hatanpäänvaltatie 34 A
E-mail: sitek@sitek.fi

40320 Jyväskylä Finland
33100 Tampere Finland
www.sitek.fi

Tel. +358 14 337 2300
Puh. +358 3 265 4069

Dimensions

Single sided manifold 1/2"

DIMENSIONS

Number of outputs / pcs	4	6	8	10	12
Length (A)	314	454	594	734	874
Spacing of mounting holes (B)	140	240	420	560	700

Also other dimensions are possible

